

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
17 July 2003 (17.07.2003)

PCT

(10) International Publication Number  
WO 03/057561 A2(51) International Patent Classification<sup>7</sup>: B64D

(21) International Application Number: PCT/US02/41263

(22) International Filing Date:  
26 December 2002 (26.12.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/344,593 26 December 2001 (26.12.2001) US

(71) Applicant and

(72) Inventor: DUCASSE, Ricardo, A. [US/US]; 175 E. 3rd  
Street, Apt. #2A, New York, NY 10009 (US).(74) Agents: CERNOTA, Andrew, P. et al.; PO Box 3445,  
Nashua, NH 03061-3445 (US).(81) Designated States (*national*): AE, AG, AL, AM, AT (util-  
ity model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (util-  
ity model), DE, DK (utility model), DK, DM, DZ, EC, EE  
(utility model), EE, ES, FI (utility model), FI, GB, GD, GE,  
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ,  
LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,  
MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC,  
SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR,  
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK,  
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).

## Declaration under Rule 4.17:


— of inventorship (Rule 4.17(iv)) for US only

## Published:

— without international search report and to be republished  
upon receipt of that report

[Continued on next page]

(54) Title: VARIABLY ANGLED PROPULSION/STEERING SYSTEM

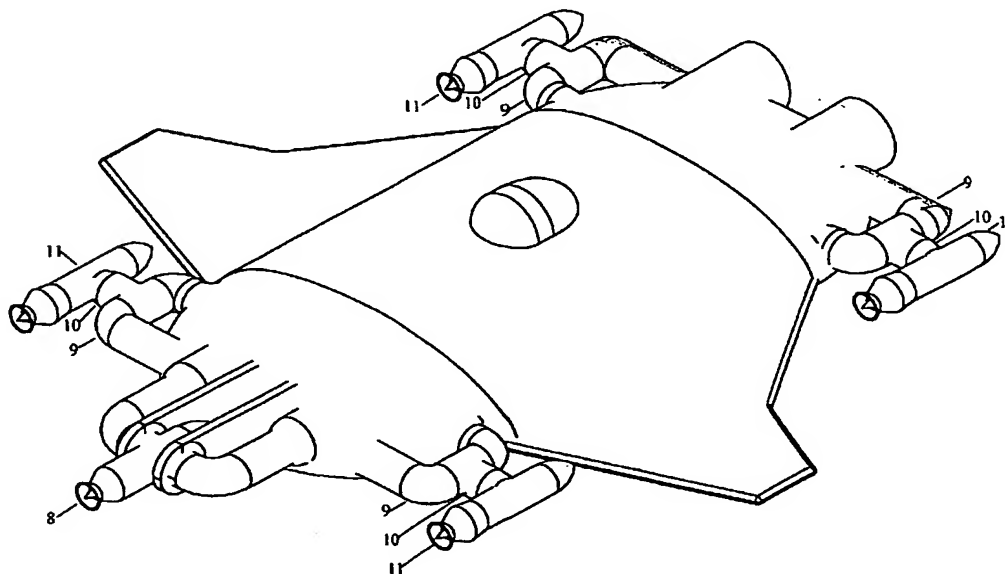

(57) Abstract: An aircraft equipped with peripherally configured directional thrust capability has an onboard primary power source producing compressed air, and at least two thrust producing modules. Each thrust producing module has a fuel source and receives compressed air from the primary power source. Each module is attached to a respective rotatable support structure for independently varying the thrust angle of the thrust producing module with respect to the aircraft, all thrust producing modules being connected to a common controller for coordinated control of the aircraft.

WO 03/057561 A2



*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*